


AS 2947.2 STANDARD

High Voltage Porcelain Pin Type Insulators

Designed for 11kV to 33kV distribution lines. Features high-strength aluminous porcelain and an optional **Semi-Conducting Glaze Head** (Radio Interference Free) design. Manufactured strictly in accordance with AS 2947.2.

DIMENSIONAL DRAWINGS (FIG 6 - FIG 10)

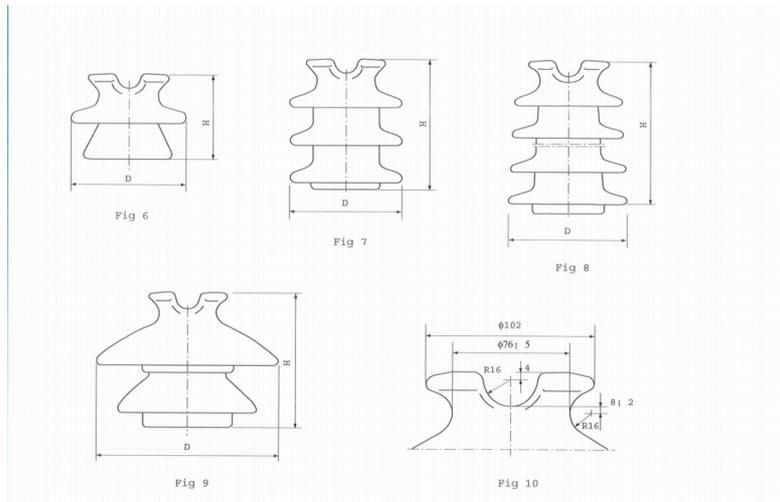

CAT. NO.	FIG.	H (MM)	DIA. (MM)	CREEPAGE (MM)	LIGHTNING IMPULSE (KV)	WET POWER FREQ (KV)	MIN FAIL LOAD (KN)	REC. SPINDLE	DESIGNATION
SLP/11/180	6	110	150	180	105	30	7	A/130/7	180S7
ALP/11/275	7	160	150	275	105	30	7	C/150/7	275A7
ALP/22/450	8	200	160	450	150	50	11	C/200/11	450A11
ALP/22/490	8	250	165	490	160	50	11	C/200/11	490A11
ALP/22/480	9	200	250	480	150	50	11	C/150/11	480F11
ALP/22/520	8	210	200	520	150	50	11	C/200/11	520F11
ALP/33/710	8	265	220	710	220	90	11	C/300/7	710A11
ALP/33/920	8	320	240	920	220	90	11	C/300/7	920A11

